

# TENSE



SOCK6MMMSG1

## SPECIFICATIONS

Type of protection (EN 60529): **IP20**

Compatibility: Legrand Mosaic  
Legrand Arteor

Dimensions in mm (w x h):	1F	84 x 84 x 6 mm
	2F	155 x 84 x 6 mm
	3F	226 x 84 x 6 mm
	4F	297 x 84 x 6 mm
	5F	368 x 84 x 6 mm

## ACCESSORIES:


The Socket Frame 6MM with square opening can be completed by using additional accessories.

## TRIMLESS WALLBOX

TRIM\_SOCKET6MMMPx\_BC (brick or concrete/metal, corian or wood),  
TRIM\_SOCKET6MMMPx\_P (plasterboard/metal, corian or wood),

The Socket Frame 6MM with square opening is surface mount, but can be **made 100% recessed** with the **Trimless Wallbox** delivered by Xillo®. The fixture is in one piece and completely made out of the **solid patented composite**, so no need for an extra mounting kit. Easily install this wallbox in the wall thanks to the **pre-drilled holes**. The unique layer design and the **handy indicators for laser positioning** make sure that every fixture is **easy to plaster**. In addition, the typical Xillo pattern and large mounting surface ensure that the plaster is always **perfectly fixated**. The Trimless Wallbox is available for all 6 MM sockets **1F to 4F**.

Please note that the standard European round backbox Ø68 is included.

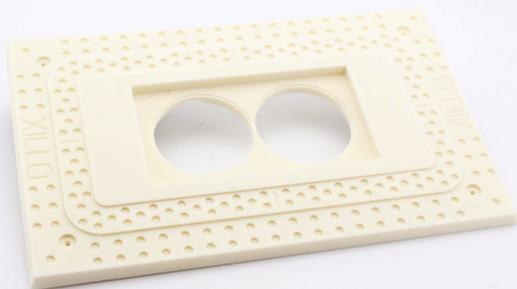

TRIM\_SOCKET6MMMP2\_P

## SOCKET FRAME 6MM SQUARE


The **Socket Frame 6MM** with square opening is Tense's **architectural** approach on Socket Frames. With its **minimalistic** look and slim design it is a true **design** solution

The Socket frame is available for **single** Standard inserts.


With a thickness of only **6mm** the Socket Frame 6MM with square opening has the same thickness as the metal **Tense Intensity switch**. The Socket Frame 6MM with round opening is available in 1F, 2F, 3F, 4F and 5F in all **metal finishes** of the Tense range.

The socket frame 6MM with square opening can be installed on a regular **single British or European square or round wallbox**. The Socket 6MM is best mounted on the round Kaiser boxes. If installed on a different brand wallbox, adaptations to the black plastic bracket needs to be done. Shave the elevated rounded corners of the black bracket until it fits in the wallbox. When installing multiple fold socket frames only **single British wallboxes** can be used or any other wallbox with a **centre-to-centre distance of 71mm**.

The socket is **surface mount**, but **can be made 100% recessed** with the Trimless Wallbox delivered by Xillo®.

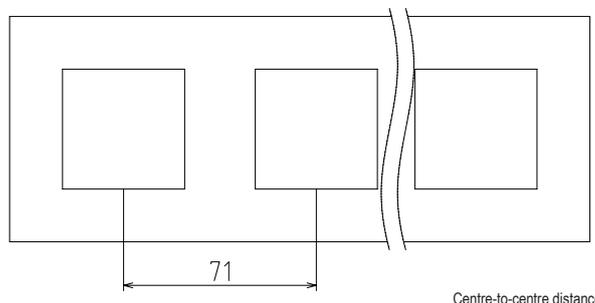

Centre-to-centre distance

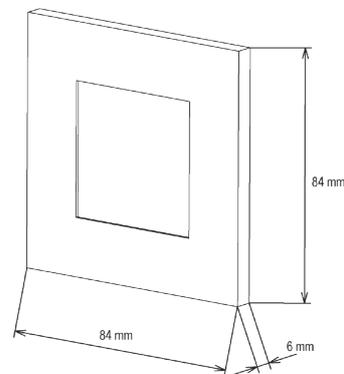

Detailed Drawing


## ACCESSORIES

To ensure a perfect installation of your Socket frame, one **Trimless Spacer** (TRIM\_SPACER05) is included with each SOCK6MMS order. Please do not throw away the spacer.

### SPACERS

1 x TRIM\_SPACER05 (Trimless Spacer 0,5 mm).

To obtain the **perfect end result** there might be some levelling of the products necessary. Use the spacer to **level** the insert with the socket frame.



SPACER 0,5 MM

## FINISHES

1F, 2F, 3F, 4F & 5F available in all metal finishes.

### Aluminium:

Alu (brushed)	SOCK6MMSA
Forged Alu	SOCK6MMSFA
Alu Black (brushed)	SOCK6MMSAB
Forged Alu Black	SOCK6MMSFAB
Alu Dark Grey (brushed)	SOCK6MMSADG
Forged Alu Dark Grey	SOCK6MMSFADG
Alu White (RAL 9016)	SOCK6MMSAW
Alu RAL (on request)	SOCK6MMSARAL

### Bronze:

Bronze	SOCK6MMSB
Forged Bronze	SOCK6MMSFB
Bronze Light	SOCK6MMSBL
Forged Bronze Light	SOCK6MMSFBL

### Metal:

Chrome (polished)	SOCK6MMSCH
Stainless Steel (brushed)	SOCK6MMSSS
Forged Stainless Steel	SOCK6MMSFSS
Forged Steel	SOCK6MMSFS
Brushed Gold	SOCK6MMSBG
Forged Gold	SOCK6MMSFG
Brushed Copper Rose	SOCK6MMSBCR
Forged Copper Rose	SOCK6MMSFCR