


TENSE



TRIM_MOTPLUS & MOTPLUS_W

SPECIFICATIONS

Material: Patented Composite; Paintable

Type of protection (EN 60529): IP20

Measurements: 200 x 200 x 37mm

Opening: 75 mm

Operating temperatures: +10 °C to +45 °C

Cut-out: Plasterboard [P]: 204 x 204mm


Brick / Concrete [BC]: min Ø 93mm

Installation Depth: Plasterboard [P]: 27,5mm

Brick / Concrete [BC]: 34mm



TRIM_MOTPLUS & MOTPLUS_W



TRIM_SWITCHGS124_P

INSTALLATION INSTRUCTIONS:

- Plasterboard** : Cut out a **204 x 204 mm hole** in the plasterboard ceiling and install 2 wooden bars.
Concrete / Brick : Drill a **Ø87 mm hole** in the concrete or brick ceiling.
- Pull the **wires through the back** of the ceiling fixture.
- Level the fixture using the **alignment marks** and a **laser**.
- Plasterboard** : **Screw** the fixture on the **wooden bars** by using 4 screws and the pre-drilled holes in the fixtures.
Concrete / Brick : **Screw** the fixture on the **concrete or brick wall** by using 4 plugs, screws and the pre-drilled holes in the fixtures.
- Fill the gaps around the fixture with **joint filler**.
- Add the fibreglass netting and **plaster** up to the rounded second level.
- Smoothen** with a sanding machine.
- Paint** the ceiling and the inside of the fixture.
- Install and mount** the **Motivity Plus** according to its manual.

Do not install the Xillo fixture above heating, fire place, airconditioning unit, in direct sunshine, poolhouses, garden pavilions or exterior applications.

TRIMLESS MOTPLUS

The **Trimless Motplus Ceiling box** by Xillo® is a special ceiling fixture made with the patented Xillo® material. It allows you to have a perfect 100% **recessed** solution for both **Plasterboard** and **Brick / Concrete** ceiling structures for your **Motivity Plus** detector.



This Xillo® composite material has the **same characteristics as plaster**: it crimps and expands together. Apart from these similarities it is stronger and more **robust** than plaster.

With our Tense ceiling fixtures we offer you an **all-in-one solution**. The fixture is one piece and completely made of the solid **patented composite**, so no need for an extra mounting kit. Thanks to the strength of this material, we don't have to work with any metal frame. Easily install this fixture in the ceiling thanks to the **pre-drilled holes and the handy indicators for laser positioning**. This results in a perfectly 100% recessed end-result.

In addition, the typical Tense pattern, the **unique layer design** and large mounting surface ensure that the plaster is always **perfectly fixated**. This all ensures an installation without any cracks nor visible borders, even after several years of installation.

Furthermore, you can easily **mechanically adjust** these fixtures, according to your installation requirements.

As these ceiling fixtures are available in **6mm** (Brick / Concrete) and **12,5mm** (Plasterboard) thickness, no matter what structure ceiling you have a **perfect end result** will be guaranteed with the fixtures.

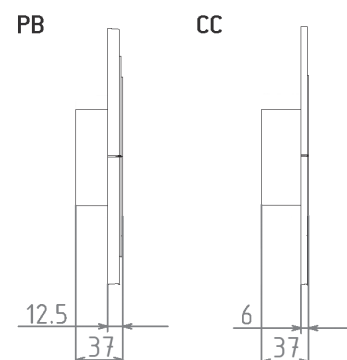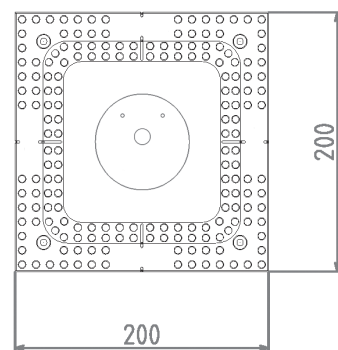

Detailed Drawing

